

Norsonic AS

P.O.Box 24
 N-3421 Lierskogen, Norway
 Tel. +47 3285 8900, Fax +47 3285 2208
www.norsonic.com, info@norsonic.com




Customer:

Clinica veterinario – MILANO

M4 TUTTO ACCESO

Microphone position:	Come M1	Operator:	SORGEDIL
Measurement title:	NOR140_FILE_150318_0004	Date:	18/03/2015 14:55:43
Measurement duration:	0 00:01:22.000	Period length:	0 00:00:00.250
Initial calibration level:		Filter bandwidth:	1/3-octave
		Instrument sensitivity:	-26,0 dB
		End calibration level:	

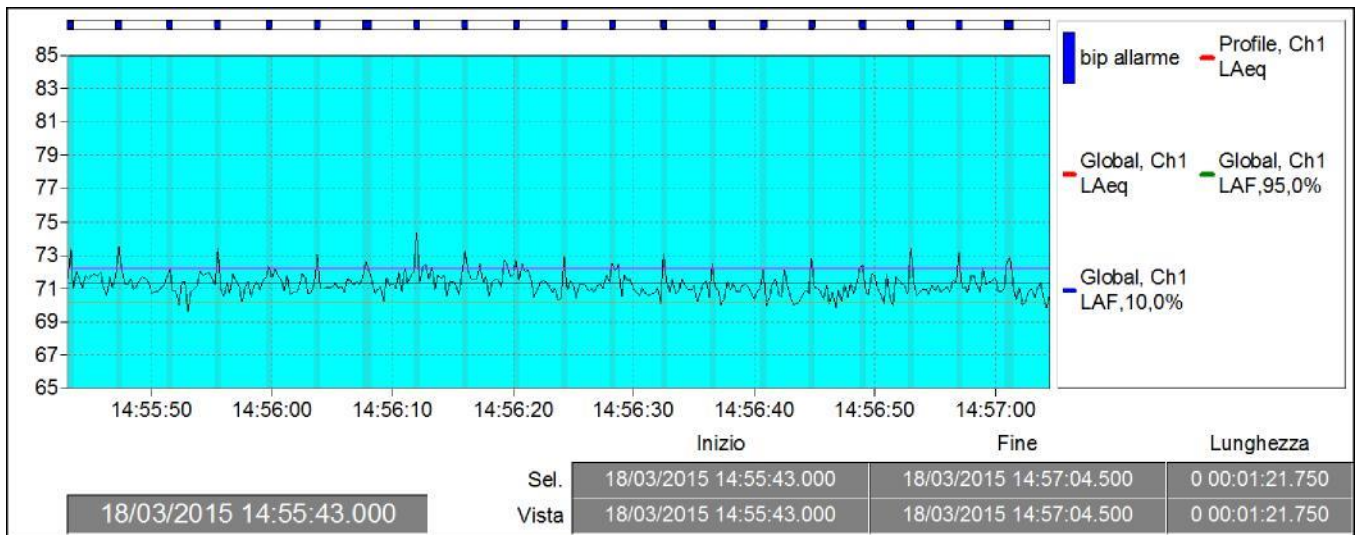

C:\Users\Insonora\Desktop\150318\NVA\NOR140_FILE_150318_0004.NBF					
Nor140 Senza mascheramenti	18/03/2015 14:55:43.000	Profile, Ch1 LAeq = 71,3 dB	Global, Ch1 LAeq = 71,3 dB	Global, Ch1 LAF,95,0% = 70,2 dB	Global, Ch1 LAF,10,0% = 72,2 dB
Media con mascheramento eventi estranei	0 00:01:21.750	71,2 dB			

Specialista nell'isolamento acustico


Via V. Emanuele N°7
 22060 Cabiato (CO)
 Tel. 031.75.69.50 Fax. 0312281356
 Cel. 339.13.69.788
 P.IVA 03208620132
 C.F. SRGVTR79M15F205V
www.sorgedil.it
 E-mail. sorgedil@gmail.com

Norsonic AS

P.O.Box 24

N-3421 Lierskogen, Norway

Tel. +47 3285 8900, Fax +47 3285 2208

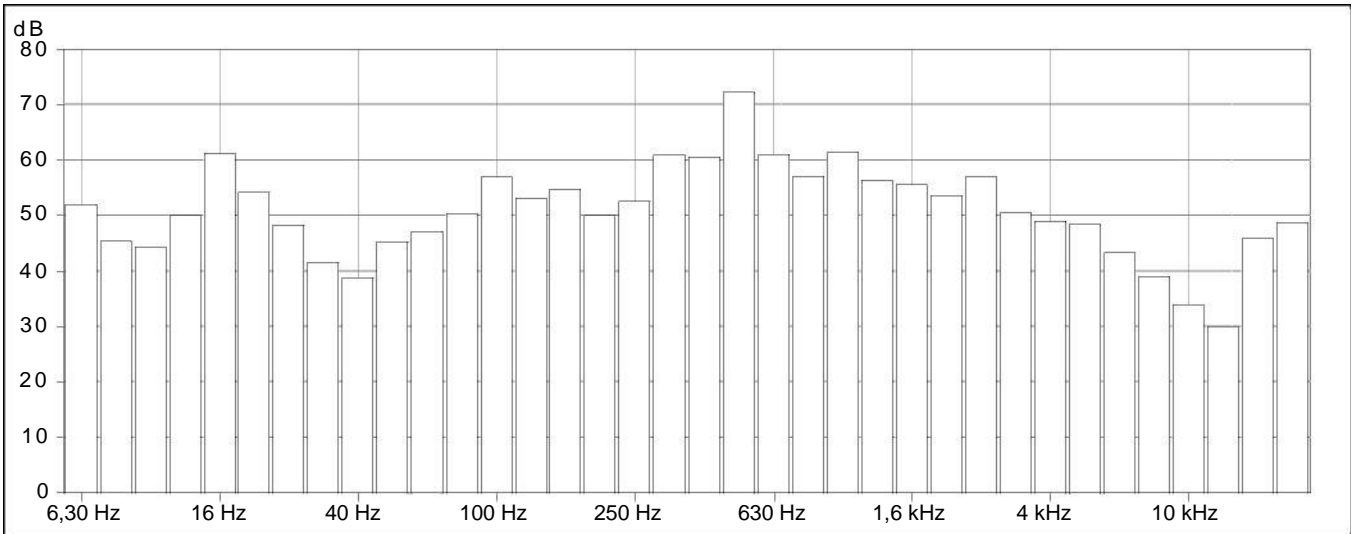www.norsonic.com, info@norsonic.com

	Leq (dB)	LF(max) (dB)	LF(min) (dB)	LI(max) (dB)	LF,10,0% (dB)	LF,95,0% (dB)
A	71,3 dB	74,9 dB	69,4 dB	76,6 dB	72,2 dB	70,2 dB
Z	75,1 dB	86,1 dB	72,7 dB	87,8 dB	75,7 dB	73,5 dB
FRQ						
6,30 Hz	51,9 dB	67,8 dB	35,4 dB	69,1 dB	53,1 dB	40,9 dB
8 Hz	45,4 dB	57,3 dB	28,8 dB	58,3 dB	48,3 dB	36,0 dB
10 Hz	44,4 dB	53,7 dB	29,7 dB	55,0 dB	47,5 dB	35,4 dB
12,5 Hz	50,0 dB	59,4 dB	37,0 dB	60,6 dB	52,8 dB	42,7 dB
16 Hz	61,3 dB	69,9 dB	44,6 dB	70,7 dB	64,4 dB	53,0 dB
20 Hz	54,2 dB	64,2 dB	42,6 dB	65,7 dB	57,2 dB	47,4 dB
25 Hz	48,3 dB	56,0 dB	37,4 dB	57,2 dB	51,0 dB	42,2 dB
31,5 Hz	41,6 dB	48,8 dB	31,7 dB	50,6 dB	44,1 dB	36,2 dB
40 Hz	38,7 dB	45,4 dB	31,0 dB	48,2 dB	40,9 dB	34,9 dB
50 Hz	45,3 dB	50,5 dB	38,3 dB	53,3 dB	47,6 dB	41,2 dB
63 Hz	47,1 dB	52,5 dB	40,1 dB	54,6 dB	49,0 dB	43,5 dB
80 Hz	50,4 dB	55,1 dB	44,6 dB	57,6 dB	52,0 dB	47,6 dB
100 Hz	57,0 dB	60,1 dB	51,1 dB	61,3 dB	58,4 dB	54,9 dB
125 Hz	53,1 dB	57,6 dB	46,6 dB	59,7 dB	54,7 dB	50,3 dB
160 Hz	54,8 dB	60,5 dB	49,7 dB	63,3 dB	56,5 dB	52,1 dB
200 Hz	50,0 dB	54,4 dB	46,0 dB	56,3 dB	51,5 dB	47,8 dB
250 Hz	52,6 dB	57,9 dB	48,6 dB	60,7 dB	53,9 dB	50,7 dB
315 Hz	60,9 dB	65,0 dB	56,9 dB	66,8 dB	62,4 dB	58,8 dB
400 Hz	60,5 dB	63,2 dB	57,8 dB	64,9 dB	61,5 dB	59,1 dB
500 Hz	72,3 dB	75,2 dB	69,2 dB	77,3 dB	73,3 dB	70,6 dB
630 Hz	61,0 dB	63,0 dB	59,2 dB	64,9 dB	61,7 dB	60,0 dB
800 Hz	57,1 dB	59,2 dB	54,9 dB	60,8 dB	57,8 dB	56,0 dB
1 kHz	61,5 dB	64,3 dB	58,8 dB	66,0 dB	62,5 dB	60,1 dB
1,25 kHz	56,4 dB	58,1 dB	54,4 dB	59,4 dB	57,0 dB	55,5 dB
1,6 kHz	55,5 dB	57,4 dB	53,8 dB	58,9 dB	56,1 dB	54,7 dB
2 kHz	53,6 dB	55,0 dB	52,2 dB	56,2 dB	54,2 dB	52,9 dB
2,5 kHz	56,9 dB	70,4 dB	50,7 dB	73,5 dB	59,4 dB	51,3 dB
3,15 kHz	50,4 dB	53,6 dB	49,1 dB	55,3 dB	51,0 dB	49,7 dB
4 kHz	49,0 dB	50,0 dB	48,0 dB	50,7 dB	49,3 dB	48,5 dB
5 kHz	48,4 dB	58,1 dB	45,4 dB	60,5 dB	49,9 dB	46,0 dB

SORGEDIL

Specialista nell'isolamento acustico

Via V. Emanuele N°7

22060 Cabiato (CO)

Tel. 031.75.69.50 Fax. 0312281356

Cel. 339.13.69.788

P.IVA 03208620132

C.F. SRGVTR79M15F205V

www.sorgedil.itE-mail. sorgedil@gmail.com

6,3 kHz	43,3 dB	44,6 dB	42,1 dB	45,6 dB	43,7 dB	42,8 dB
8 kHz	39,0 dB	41,7 dB	38,2 dB	43,0 dB	39,4 dB	38,5 dB
10 kHz	34,0 dB	37,1 dB	33,2 dB	38,4 dB	34,4 dB	33,5 dB
12,5 kHz	30,0 dB	34,6 dB	28,8 dB	35,6 dB	31,0 dB	29,3 dB
16 kHz	45,9 dB	48,7 dB	41,7 dB	49,0 dB	47,0 dB	43,7 dB
20 kHz	48,8 dB	51,6 dB	44,2 dB	51,9 dB	50,0 dB	46,5 dB

SORGEDIL

Specialista nell'isolamento acustico

Via V. Emanuele N°7
22060 Cabiato (CO)

Tel. 031.75.69.50 Fax. 0312281356

Cel. 339.13.69.788

P.IVA 03208620132

C.F. SRGVTR79M15F205V

www.sorgedil.it

E-mail. sorgedil@gmail.com